


Prescripciones de apriete para culatas

Hyundai / KIA



Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete

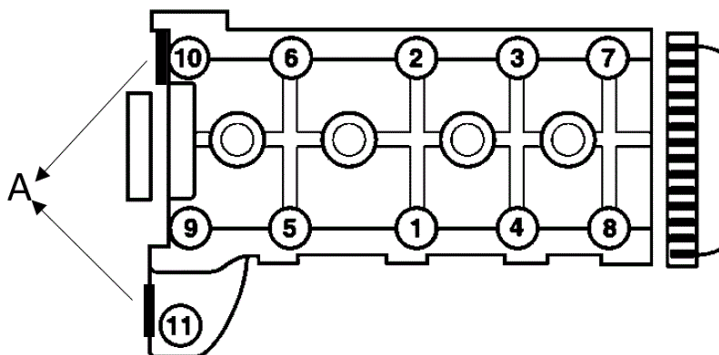

M14 x 1.5 x 172 AV

- ☼ A: Dirko Sealing compound
 - 1-10: 79±1 Nm
 - 1-10: 120°
 - 1-10: 120°
 - 11: 32±2 Nm

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Hyundai / Kia

Mot. D4HB

Sorento

÷: 1,20 mm / Ø: 86,2 mm

service@elring.de

24/01/22

826.350