

General informations

| | |
|-------------------------|-------------|
| Battery name | 135MS |
| Product Range | Fortis |
| European Type No. (ETN) | 635.044.100 |
| Polarity | SX |
| Technology | Flooded |
| Application | SLI |
| Standard ref. | EN 50342-1 |



Battery with low self-discharge and maintenance-free thanks to the use of Ca/Ca technology in the production of the plates. High resistance to vibrations and stress. The HD* version boasts outstanding resistance to charge/discharge cycles. Owing to the use of glass fiber separators.

General characteristics

| | |
|-----------------------------------|-------|
| Voltage (V) | 12 |
| Capacity 20h (Ah) | 135 |
| Cold cranking Amps (CCA), EN (A) | 1,000 |
| Energy at 20hrs rate and 25C (Wh) | 1,613 |
| Cranking Power 10" at -18°C (KW) | 7,8 |

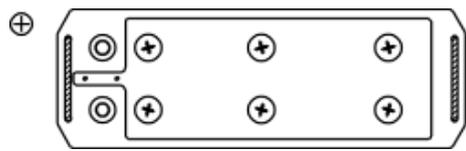
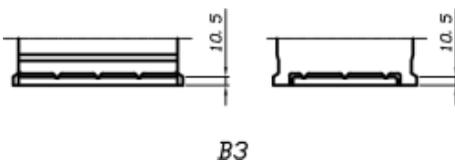
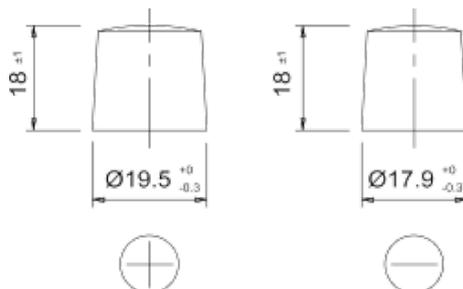
| | |
|------------------------------|-----------------|
| Dimensional group | |
| Sizes (LxWxH) (mm) | 513 x 175 x 210 |
| Base Hold-Down | B3 |
| Lay-out/Terminals | 3 / 1 |
| Battery weight \pm 5% (kg) | 37,5 |

Box

| | |
|------|-------|
| Case | PP/PE |
| Lid | PP/PE |
| Plug | PP/PE |

| | |
|--------|-------|
| Colour | Black |
| Colour | Black |
| Colour | Black |

Drawings

| Lay-out | Base hold down | Terminals type |
|--|--|---|
|  |  |  |