

General informations

Battery name	150MS
Product Range	Fortis - HD (Heavy Duty)
European Type No. (ETN)	650.044.100
Polarity	SX
Technology	Flooded
Application	SLI
Standard ref.	EN 50342-1; EN 50342-4



Battery with low self-discharge and maintenance-free thanks to the use of Ca/Ca technology in the production of the plates. High resistance to vibrations and stress. The HD* version boasts outstanding resistance to charge/discharge cycles. Owing to the use of glass fiber separators.

General characteristics

Voltage (V)	12
Capacity 20h (Ah)	150
Cold cranking Amps (CCA), EN (A)	1,000
Energy at 20hrs rate and 25C (Wh)	1,793
Cranking Power 10" at -18°C (KW)	7,8

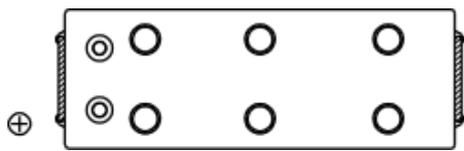

Dimensional group	
Sizes (LxWxH) (mm)	510 x 175 x 225
Base Hold-Down	B3
Lay-out/Terminals	3 / 1
Battery weight \pm 5% (kg)	33,3

Box

Case	PP/PE
Lid	PP/PE
Plug	PP/PE

Colour	Black
Colour	Black
Colour	Black

Drawings

Lay-out	Base hold down	Terminals type
	 <p>B3</p>	