

## General informations

|                         |                        |
|-------------------------|------------------------|
| Battery name            | C100                   |
| Product Range           | Celeris - Standard DIN |
| European Type No. (ETN) | 600.035.079            |
| Polarity                | DX                     |
| Technology              | Flooded                |
| Application             | SLI                    |
| Standard ref.           | EN 50342-1; EN 50342-2 |



Maintenance-free Ca/Ca technology high performance batteries, designed to offer good performance with excellent quality-price ratio.

## General characteristics

|                                   |       |
|-----------------------------------|-------|
| Voltage (V)                       | 12    |
| Capacity 20h (Ah)                 | 100   |
| Cold cranking Amps (CCA), EN (A)  | 790   |
| Energy at 20hrs rate and 25C (Wh) | 1,195 |
| Cranking Power 10" at -18°C (KW)  | 6,2   |

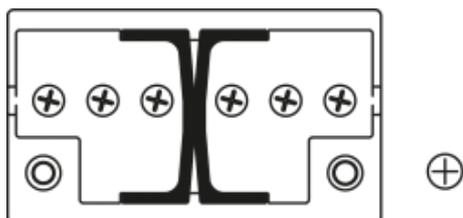
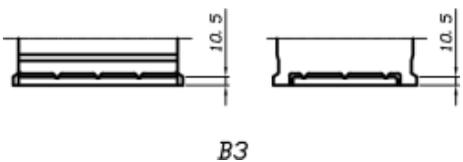
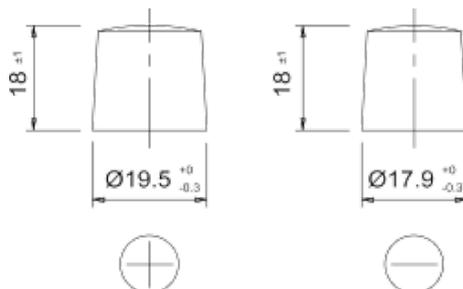
|                              |                 |
|------------------------------|-----------------|
| Dimensional group            | LN4             |
| Sizes (LxWxH) (mm)           | 310 x 175 x 190 |
| Base Hold-Down               | B3(f)           |
| Lay-out/Terminals            | 0 / 1           |
| Battery weight $\pm$ 5% (kg) | 20,3            |

## Box

|      |       |
|------|-------|
| Case | PP/PE |
| Lid  | PP/PE |
| Plug | PP/PE |

|        |       |
|--------|-------|
| Colour | Black |
| Colour | Black |
| Colour | Black |

## Drawings

| Lay-out  | Base hold down   | Terminals type  |
|--|--|---|
|  |  |  |