

General informations

| | |
|-------------------------|------------------------|
| Battery name | C24S |
| Product Range | Celeris - Standard DIN |
| European Type No. (ETN) | 524.030.018 (DRY) |
| Polarity | SX |
| Technology | Flooded (Dry Charge) |
| Application | SLI |
| Standard ref. | EN 50342-1; EN 50342-2 |



Maintenance-free Ca/Ca technology high performance batteries, designed to offer good performance with excellent quality-price ratio.

General characteristics

| | |
|-----------------------------------|-----|
| Voltage (V) | 12 |
| Capacity 20h (Ah) | 24 |
| Cold cranking Amps (CCA), EN (A) | 180 |
| Energy at 20hrs rate and 25C (Wh) | 287 |
| Cranking Power 10" at -18°C (KW) | 1,4 |

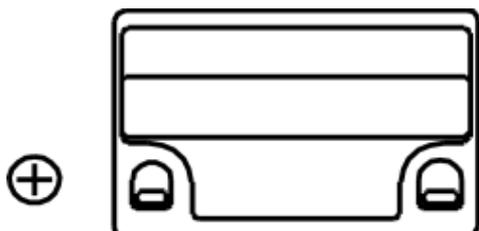
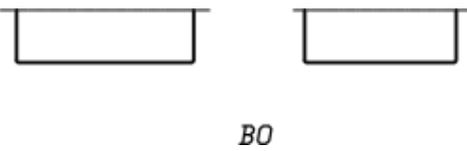
| | |
|------------------------------|-----------------|
| Dimensional group | |
| Sizes (LxWxH) (mm) | 187 x 128 x 167 |
| Base Hold-Down | B0 |
| Lay-out/Terminals | 1 / 4 |
| Battery weight \pm 5% (kg) | 7,7 |

Box

| | |
|------|-------|
| Case | PP/PE |
| Lid | PP/PE |
| Plug | PP/PE |

| | |
|--------|-------------|
| Colour | Nat. Opaque |
| Colour | Black |
| Colour | Black |

Drawings

| Lay-out | Base hold down | Terminals type |
|--|--|----------------|
|  |  | |