

General informations

Battery name	C24
Product Range	Celeris - Standard DIN
European Type No. (ETN)	524.015.018 (DRY)
Polarity	DX
Technology	Flooded (Dry Charge)
Application	SLI
Standard ref.	EN 50342-1; EN 50342-2



Maintenance-free Ca/Ca technology high performance batteries, designed to offer good performance with excellent quality-price ratio.

General characteristics

Voltage (V)	12
Capacity 20h (Ah)	24
Cold cranking Amps (CCA), EN (A)	180
Energy at 20hrs rate and 25C (Wh)	287
Cranking Power 10" at -18°C (KW)	1,4

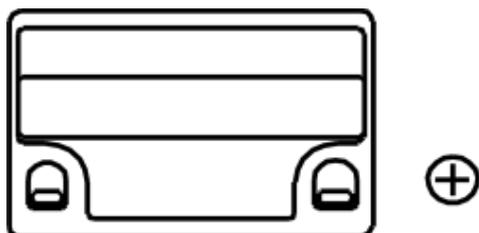
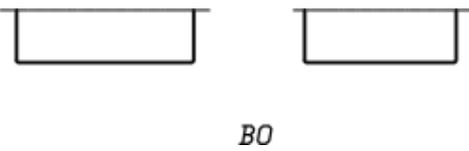
Dimensional group	
Sizes (LxWxH) (mm)	187 x 128 x 167
Base Hold-Down	B0
Lay-out/Terminals	0 / 4
Battery weight \pm 5% (kg)	7,7

Box

Case	PP/PE
Lid	PP/PE
Plug	PP/PE

Colour	Nat. Opaque
Colour	Black
Colour	Black

Drawings

Lay-out	Base hold down	Terminals type
	 B0	