

## General informations

Battery name	C32
Product Range	Celeris - Standard DIN
European Type No. (ETN)	532.011.022 (DRY)
Polarity	DX
Technology	Flooded (Dry Charge)
Application	SLI
Standard ref.	EN 50342-1; EN 50342-2



Maintenance-free Ca/Ca technology high performance batteries, designed to offer good performance with excellent quality-price ratio.

## General characteristics

Voltage (V)	12
Capacity 20h (Ah)	32
Cold cranking Amps (CCA), EN (A)	220
Energy at 20hrs rate and 25C (Wh)	382
Cranking Power 10" at -18°C (KW)	1,7

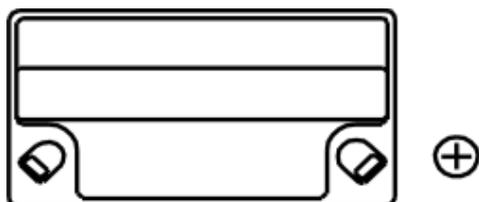
Dimensional group	
Sizes (LxWxH) (mm)	233 x 131 x 167
Base Hold-Down	B0
Lay-out/Terminals	0 / 4
Battery weight $\pm$ 5% (kg)	9,9

## Box

Case	PP/PE
Lid	PP/PE
Plug	PP/PE

Colour	Nat. Opaque
Colour	Black
Colour	Black

## Drawings

Lay-out	Base hold down	Terminals type
	 <p>B0</p>	