

## General informations

Battery name	C50
Product Range	Celeris - Standard DIN
European Type No. (ETN)	550.059.042
Polarity	DX
Technology	Flooded
Application	SLI
Standard ref.	EN 50342-1; EN 50342-2



Maintenance-free Ca/Ca technology high performance batteries, designed to offer good performance with excellent quality-price ratio.

## General characteristics

Voltage (V)	12
Capacity 20h (Ah)	50
Cold cranking Amps (CCA), EN (A)	420
Energy at 20hrs rate and 25C (Wh)	598
Cranking Power 10" at -18°C (KW)	3,3

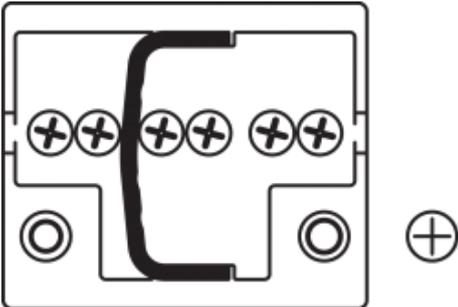
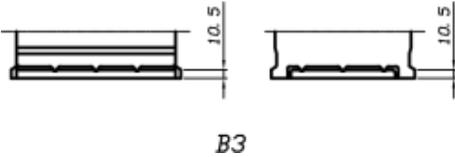
Dimensional group	LN1
Sizes (LxWxH) (mm)	207 x 175 x 190
Base Hold-Down	B3(f)
Lay-out/Terminals	0 / 1
Battery weight $\pm$ 5% (kg)	11,5

## Box

Case	PP/PE
Lid	PP/PE
Plug	PP/PE

Colour	Black
Colour	Black
Colour	Black

## Drawings

Lay-out	Base hold down	Terminals type
	 <p>B3</p>	