

General informations

Battery name	H50J
Product Range	Hermeticum - Asian JIS
European Type No. (ETN)	S550.041.042
Polarity	DX
Technology	Flooded
Application	SLI
Standard ref.	EN 50342-1; JIS D5301



"Sealed" battery with double lid and labyrinth thermo welded to the upper lid. The double lid includes flame arrestor device.

General characteristics

Voltage (V)	12
Capacity 20h (Ah)	50
Cold cranking Amps (CCA), EN (A)	420
Energy at 20hrs rate and 25C (Wh)	598
Cranking Power 10" at -18°C (KW)	3,3

Dimensional group	D20
Sizes (LxWxH) (mm)	200 x 170 x 225
Base Hold-Down	B0
Lay-out/Terminals	0 / 1
Battery weight \pm 5% (kg)	12,9


Box

Case	PP/PE
Lid	PP/PE
Plug	PP/PE


Colour	Black
Colour	Black
Colour	Black

Drawings


Lay-out	Base hold down	Terminals type
---------	----------------	----------------

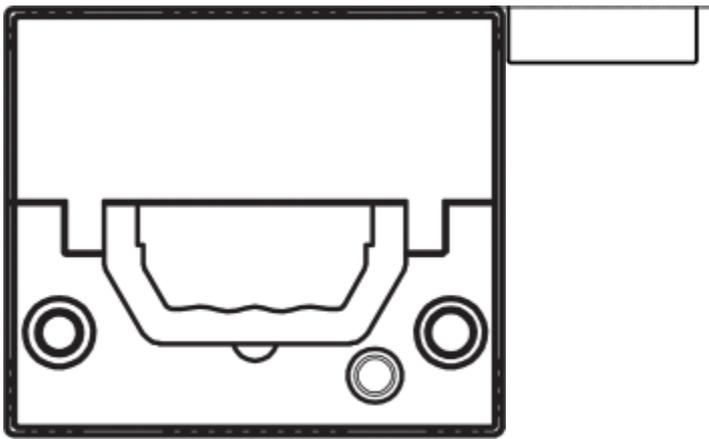

B0



18 ± 0.1

Ø19.5⁺⁰_{-0.3}

18 ± 0.1

Ø17.9⁺⁰_{-0.3}