

General informations

| | |
|-------------------------|------------------------|
| Battery name | H70JS |
| Product Range | Hermeticum - Asian JIS |
| European Type No. (ETN) | S570.024.056 |
| Polarity | SX |
| Technology | Flooded |
| Application | SLI |
| Standard ref. | EN 50342-1; JIS D5301 |



"Sealed" battery with double lid and labyrinth thermo welded to the upper lid. The double lid includes flame arrestor device.

General characteristics

| | |
|-----------------------------------|-----|
| Voltage (V) | 12 |
| Capacity 20h (Ah) | 70 |
| Cold cranking Amps (CCA), EN (A) | 560 |
| Energy at 20hrs rate and 25C (Wh) | 837 |
| Cranking Power 10" at -18°C (KW) | 4,4 |

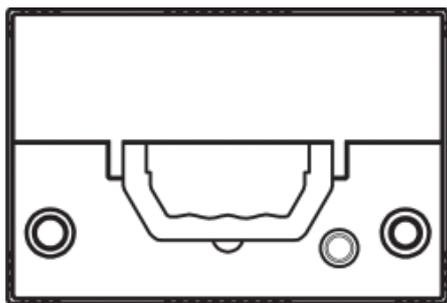

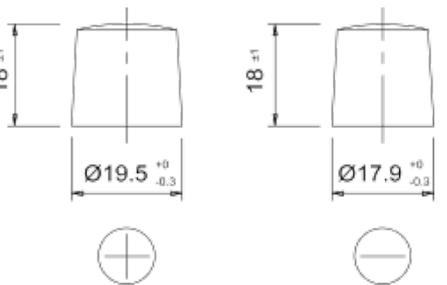
| | |
|------------------------------|-----------------|
| Dimensional group | 24F |
| Sizes (LxWxH) (mm) | 270 x 175 x 225 |
| Base Hold-Down | B3+B6 |
| Lay-out/Terminals | 1 / 1 |
| Battery weight \pm 5% (kg) | 17,7 |

Box

| | |
|------|-------|
| Case | PP/PE |
| Lid | PP/PE |
| Plug | PP/PE |

| | |
|--------|-------|
| Colour | Black |
| Colour | Black |
| Colour | Black |

Drawings

| Lay-out | Base hold down | Terminals type |
|--|---|---|
|    |  B3+B6 |  |