

General informations

Battery name	H82B
Product Range	Hermeticum - Low DIN
European Type No. (ETN)	S582.039.074
Polarity	DX
Technology	Flooded
Application	SLI
Standard ref.	EN 50342-1; EN 50342-2



"Sealed" battery with double lid and labyrinth thermo welded to the upper lid. The double lid includes flame arrestor device.

General characteristics

Voltage (V)	12
Capacity 20h (Ah)	82
Cold cranking Amps (CCA), EN (A)	740
Energy at 20hrs rate and 25C (Wh)	980
Cranking Power 10" at -18°C (KW)	5,8

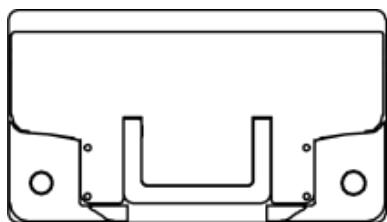

Dimensional group	LBN4
Sizes (LxWxH) (mm)	310 x 175 x 175
Base Hold-Down	B3(f)
Lay-out/Terminals	0 / 1
Battery weight $\pm 5\%$ (kg)	17,6

Box

Case	PP/PE
Lid	PP/PE
Plug	PP/PE

Colour	Black
Colour	Black
Colour	Black

Drawings

Lay-out	Base hold down	Terminals type
	  B3	