

General informations

| | |
|-------------------------|------------------------|
| Battery name | S2B |
| Product Range | Sigillum - Low DIN |
| European Type No. (ETN) | S563.077.061 |
| Polarity | DX |
| Technology | Flooded |
| Application | SLI |
| Standard ref. | EN 50342-1; EN 50342-2 |



"Sealed" battery with double lid and single cell labyrinth. It overpasses Roll-Over-Test. Best performances (+30% CCA), ideal at extreme temperatures.

General characteristics

| | |
|-----------------------------------|-----|
| Voltage (V) | 12 |
| Capacity 20h (Ah) | 63 |
| Cold cranking Amps (CCA), EN (A) | 610 |
| Energy at 20hrs rate and 25C (Wh) | 753 |
| Cranking Power 10" at -18°C (KW) | 4,8 |

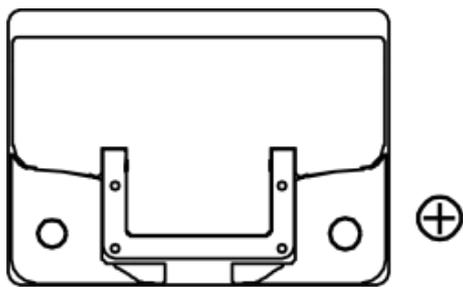
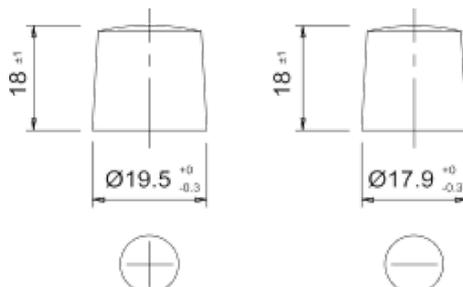
| | |
|------------------------------|-----------------|
| Dimensional group | LBN2 |
| Sizes (LxWxH) (mm) | 242 x 175 x 175 |
| Base Hold-Down | B3(B4) |
| Lay-out/Terminals | 0 / 1 |
| Battery weight \pm 5% (kg) | 14,0 |

Box

| | |
|------|-------|
| Case | PP/PE |
| Lid | PP/PE |
| Plug | PP/PE |

| | |
|--------|--------|
| Colour | Silver |
| Colour | Silver |
| Colour | Silver |

Drawings

| Lay-out | Base hold down | Terminals type |
|--|--|---|
|  |  |  |