




**Please observe the following installation instructions before installing the new camshaft adjuster in a vehicle:**

- 1.** Place the camshaft adjuster in a fresh oil bath for at least 30 minutes before installing it in the vehicle.
- 2.** This ensures that the individual components are properly lubricated at the first engine start.
- 3.** Pay attention to the oil specification of the vehicle manufacturer!

**CONSEQUENCE OF NOT PUTTING IN FRESH OIL BEFOREHAND**

→ *Damage to the camshaft adjuster due to dry running*

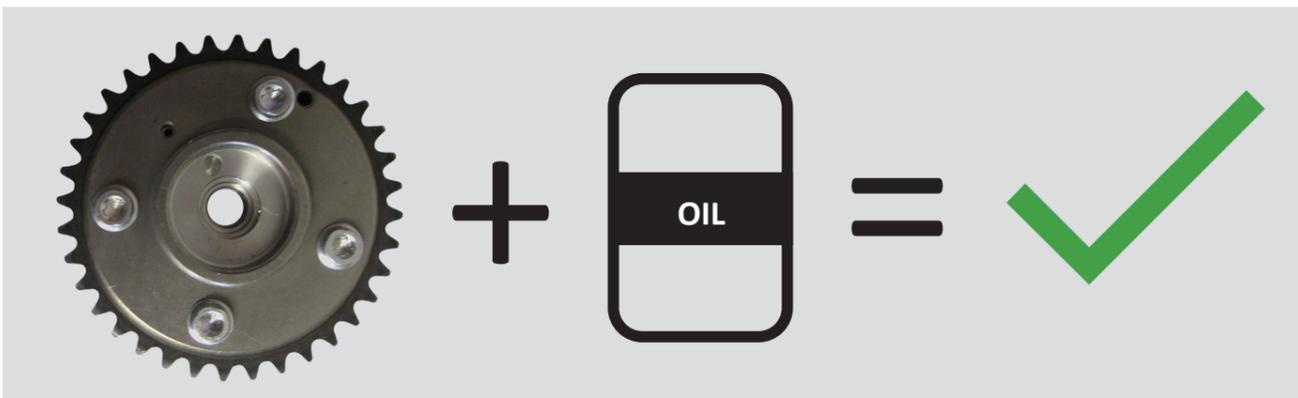

**IMPORTANT NOTICE**

Please replace the timing chain, the chain tensioner and the other gear wheels when replacing the camshaft adjuster!

This is a recommendation of the manufacturer, since the parts run into one another and thus different wear conditions and engine damages resulting from it are prevented.