


81.00 mm

252.00 mm

INSTALLATION INSTRUCTION

THE WAY OF INSTALLATION OF THIS KIND OF HUB ASSEMBLY IS DIFFERENT FROM OTHER HUB ASSEMBLY. THE WRONG WAY OF INSTALLATION WILL DAMAGE ITS INNER STRUCTURE AND SHORTEN THE LIFE TIME OF THE PRODUCT. THE EFFECT OF THE WRONG INSTALLATION INITIALLY SHOWS UP AS SHOWN BELOW.

1. This kind of hub assembly needs to be installed with special tools to avoid damages to the inner structure of the bearing. The force has to be applied on the outer ring of the bearing urgently. Otherwise with initial effect the product will make noise, can get play and the lifetime will be shortened immediately.

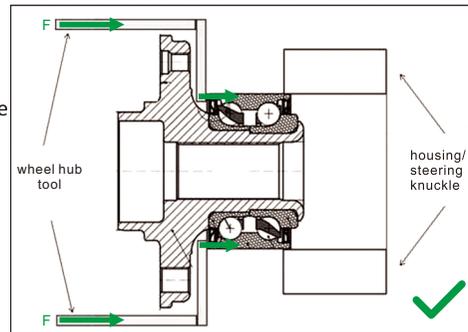

INSTALLATION INSTRUCTION

2. As shown on the picture, wrong force application will damage the inner structure and lead to the problems mentioned above.

