



THE NETHERLANDS



EEC TYPE-APPROVAL CERTIFICATE

Communication concerning the:

- type-approval
- extension-of-type-approval
- refusal-of-type-approval
- withdrawal-of-type-approval

of a type of component (towing bracket) with regard to Directive 94/20/EC

Type-approval number: e4\*94/20\*0563\*00

Reason for extension:

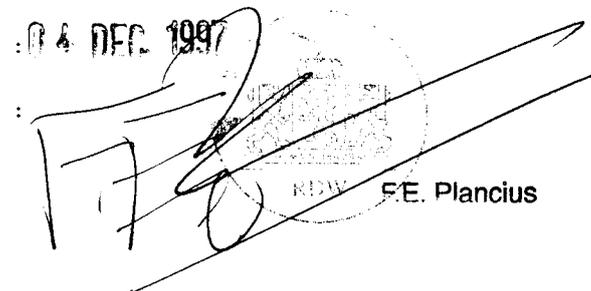
SECTION I

- 0.1 Make (trade name of manufacturer) : GDW
- 0.2. Type and general commercial description(s) : N°1001 (MITSUBISHI Galant Break)
- 0.3. Means of identification of type if marked on the component : Approval number
- 0.3.1. Location of the marking : on type plate
- 0.5. Name and address of manufacturer : GDW  
Hoogmolenwegel 23  
8790 Waregem Belgium
- 0.7. In the case of components and separate technical units, location and method of affixing of the EEC approval mark : on type plate
- 0.8. Name(s) and address(es) of assembly plants : see information document (Annex III), item 0.8



Type-approval number : e4\*94/20\*0563\*00

SECTION II

1. Additional information (where applicable) : see Appendix I
2. Technical service responsible for carrying out the tests : RDW  
Testbaan|Centrum  
Talingweg 76  
8218 NX Lelystad
3. Date of test report : 20-03-1997
4. Number of test report : TCL-94/20-417/97
5. Remarks (if any) : see Appendix I
6. Place : Zoetermeer
7. Date : 04 DEC 1997
8. Signature :  FE. Plancius
9. The index to the information package lodged with the competent authority that has granted type-approval, which may be obtained on request:
  - Application form relating to Annex III and annexed drawings
  - Drawings and instructions for attachment
  - Fitting instructions
  - Testreport, as mentioned in item 4.

651-9070

**Appendix I**  
**to EEC type-approval certificate No : e4\*94/20\*0563\*00**  
**concerning the component type-approval of mechanical coupling devices with regard to**  
**Directive 94/20/EC**

1. Additional information
- 1.1. Class of the type of coupling : A50-X
- 1.2. Categories or types of vehicles for which the device is designed or restricted : see fitting instructions
- 1.3. Maximum D-value : 7,40 kN
- 1.4. Maximum vertical load S at the coupling point : 75 kg
- 1.5. Maximum load U at the fifth wheel coupling point : -- ton
- 1.6. Maximum V-value : -- kN
- 1.7. Instructions for attachment of the coupling type to the vehicle and photographs or drawings of the fixing points at the vehicle given by the manufacturer; additional information if the use of the coupling type is restricted to special types of vehicles : see fitting instructions
- 1.8. Information on the fitting of special towing brackets or mounting plates : see fitting instructions
5. Remarks : The fitting of the towbar on the vehicle must be checked according annex I nr.5.10, according the prescriptions mentionend in annex VII

