


|             |   |           |                    |
|-------------|---|-----------|--------------------|
| <b>NAME</b> | <b>AB-EU658 Electrical Specifications</b> | <b>NO</b> | <b>AB-2-4-1150</b> |
|-------------|---|-----------|--------------------|

|                    |                 |  |
|--------------------|-----------------|--|
| <b>Picture</b><br> | <b>Plug</b><br> | <b>Waveform</b><br><br>Out Voltage: $V_{OL} \leq 1V \leq V_{OH}$ |
|--------------------|-----------------|--|

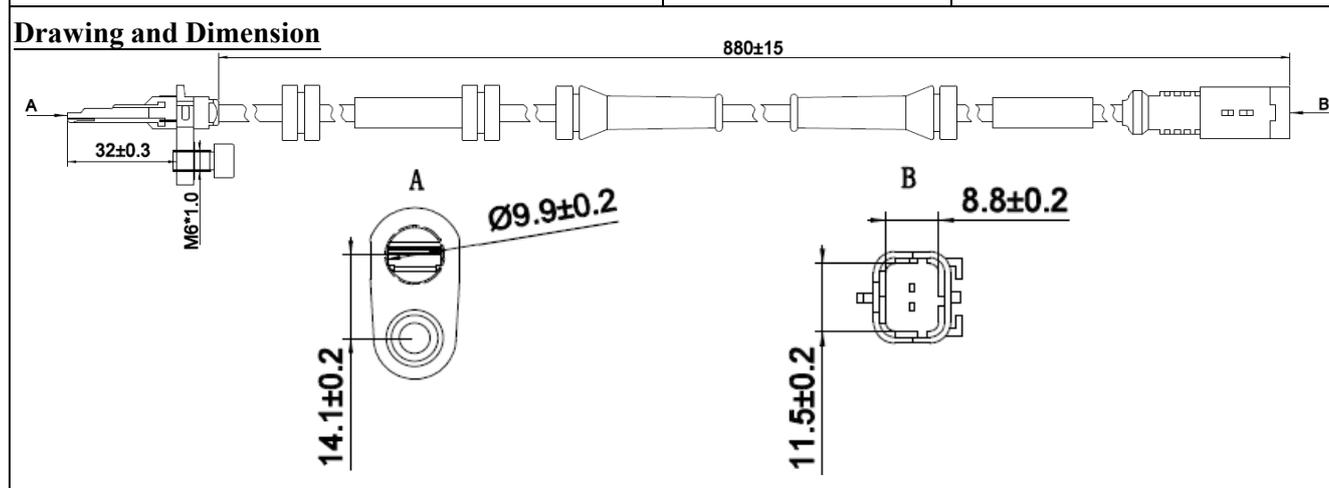

TYPE :  Hall  Magnetic

| Parameter  | SYMBOLS  | MIN. | TYP. | MAX. | UNITS |
|--|----------|------|------|------|-------|
| Resistance (25°C)  | R        | N/A  | N/A  | N/A  | ohm   |
| Inductance@1KHz  | L        | N/A  | N/A  | N/A  | mH    |
| Working Voltage  | V        | 5    | 12   | 18   | V     |
| Detecting range  | Air Gap  | N/A  | 1    | N/A  | mm    |
| Magnetic field direction<br>SFS=South facing sensor<br>NFS=North facing sensor |          | N/A  | N/A  | N/A  |       |
| Duty ratio(t1/T)   | Duty     | 45   | 50   | 55   | %     |
| Temperature  | To       | -40  | 25   | 125  | °C    |
| Reference Teeth  |          | N/A  | 58   | N/A  |       |
| Output Voltage Low<br>(600RPM,12V,1mm)   | $V_{OL}$ | 0.3  | 0.6  | 0.9  | V     |
| Output Voltage High<br>(600RPM,12V,1mm)  | $V_{OH}$ | 1.1  | 1.4  | 1.7  | V     |

|                       |                         |         |            |        |          |                   |
|-----------------------|-------------------------|---------|------------|--------|----------|-------------------|
| 2022.01.14            |                         | 1       | 王亮         | 汪芳波    | 黄鹏       | <b>MOBILETRON</b> |
| Date of first edition | Date of revised edition | edition | Manuscript | Review | Approval | Jan.19.2022       |
|                       |                         |         |            |        |          | Release           |