
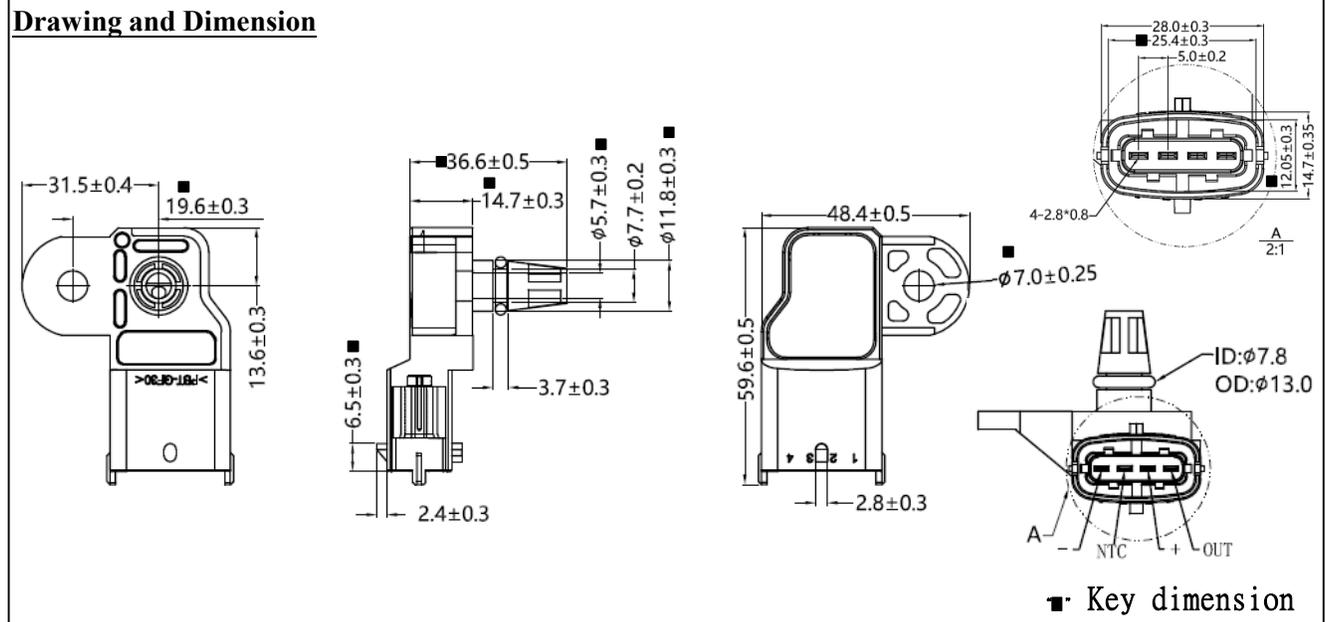


NAME	MS-E050 Electrical Specifications	NO	MS-1-4-063
-------------	--	-----------	------------

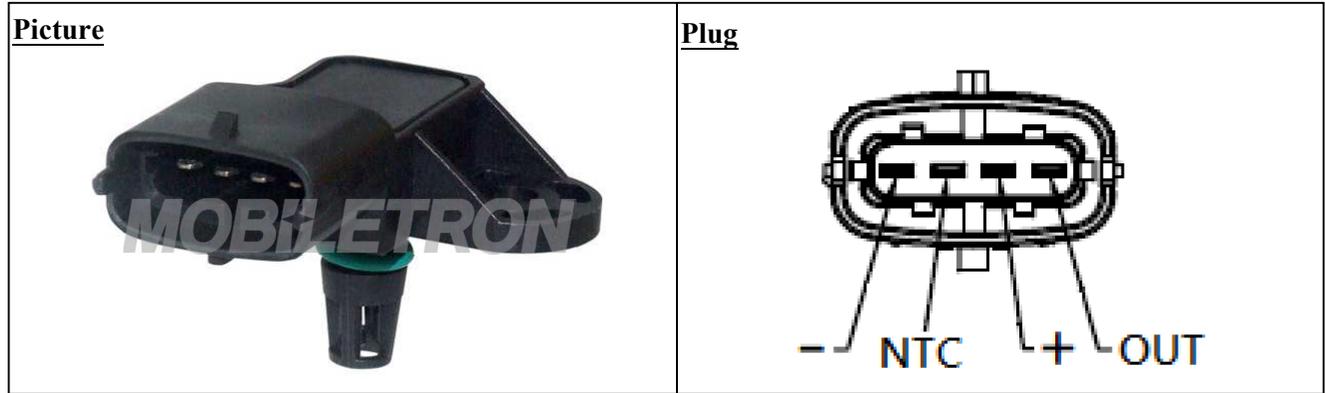

PARAMETERS AND CONDITIONS	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Storage Temperature Range	T _{ST}	-40		150	°C
Operating Temperature Range	T _{OP}	-40		125	°C
Pressure Range	Pr	4		290	KPa
Supply Voltage	V _{Sv}	4.8	5.0	5.2	V
Supply Current	I _{sc}		10		mA
Accuracy @ 25°C	%FS	-3		+3	%FS
The MAP voltage output at 25°C (@ Supply Voltage (Vs) = 5.0Vdc, rated pressure = 101.3Pa)	V	1.60	1.90	2.20	V

2020.12.10		1	呂漢榮	王亮	黃鵬	MOBILETRON
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	Dec.15.2020
						Release