


<b>NAME</b>	<b>MS-E051 Electrical Specifications</b>	<b>NO</b>	MS-1-4-064
-------------	--	-----------	------------

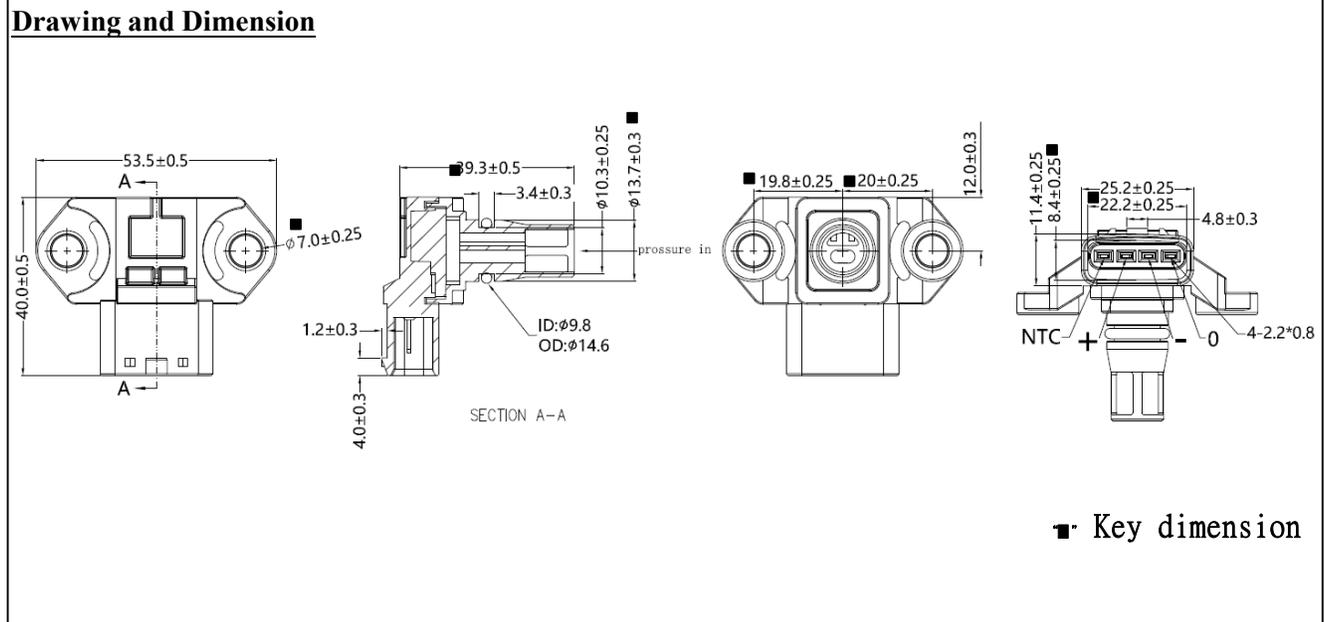

PARAMETERS AND CONDITIONS	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Storage Temperature Range	T <sub>ST</sub>	-40		150	°C
Operating Temperature Range	T <sub>OP</sub>	-40		125	°C
Pressure Range	Pr	5		364	KPa
Supply Voltage	V <sub>Sv</sub>	4.8	5.0	5.2	V
Supply Current	I <sub>sc</sub>		10		mA
Accuracy @ 25°C	%FS	-3		+3	%FS
The MAP voltage output at 25°C (@ Supply Voltage (Vs) = 5.0Vdc, rated pressure = 101.3Pa)	V	0.90	1.20	1.50	V

2020.12.10		1	呂漢榮	王亮	黃鵬	<b>MOBILETRON</b>
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	<b>Dec.15.2020</b>
						<b>Release</b>