
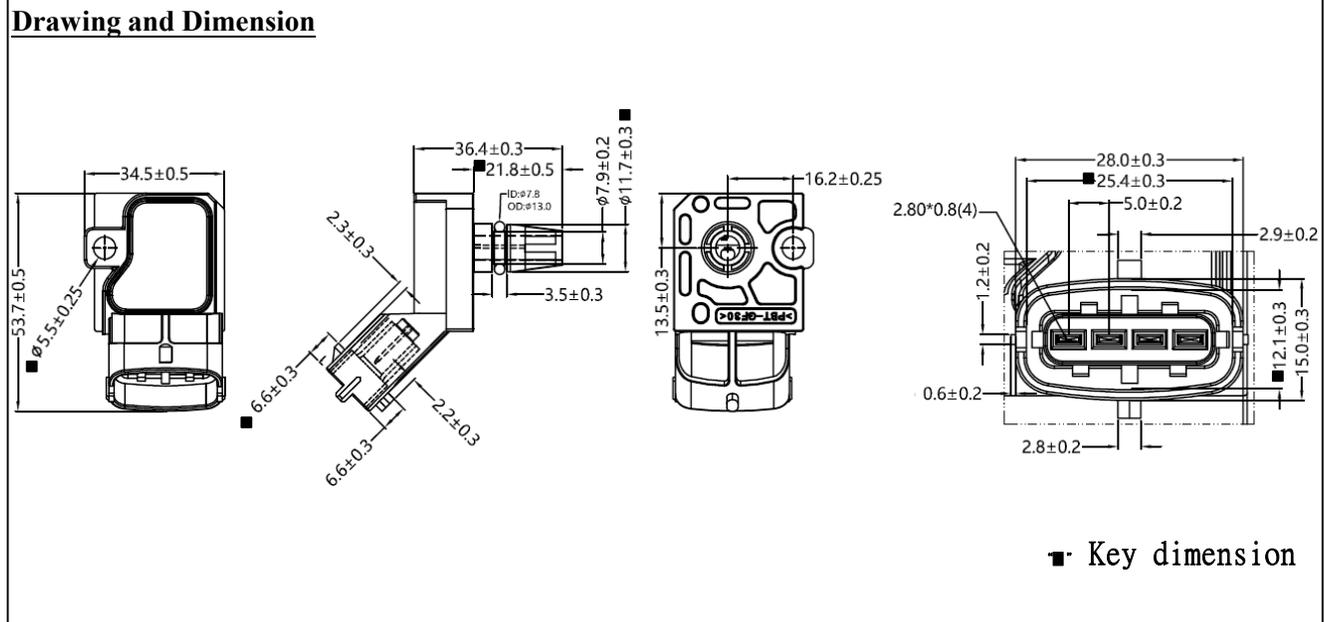


<b>NAME</b>	<b>MS-E069 Electrical Specifications</b>	<b>NO</b>	<b>MS-1-4-080</b>
-------------	--	-----------	-------------------

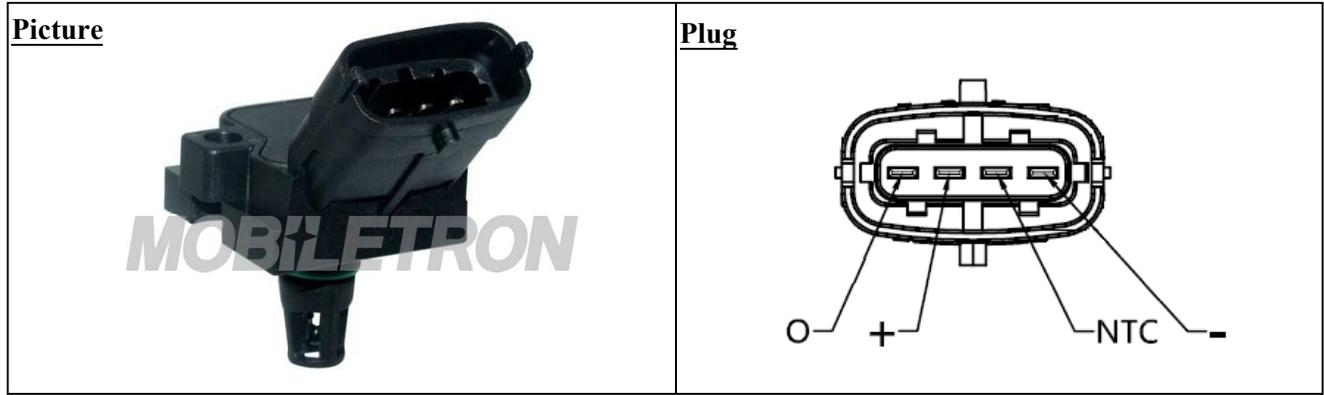

PARAMETERS AND CONDITIONS	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Storage Temperature Range	T <sub>ST</sub>	18	23	28	°C
Operating Temperature Range	T <sub>OP</sub>	-40		125	°C
Pressure Range	Pr	15		260	KPa
Supply Voltage	V <sub>Sv</sub>	4.8		5.2	V
Supply Current	I <sub>sc</sub>		10		mA
Accuracy @ 25°C	%FS	-3		+3	%FS
The MAP voltage output at 25°C (@ Supply Voltage (Vs) = 5.0Vdc, rated pressure = 101.3Pa)	V	1.58	1.88	2.18	V

2021.01.29		1	王亮	呂漢榮	黃鵬	<b>MOBILETRON</b>
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	Feb.02.2021
						Release