
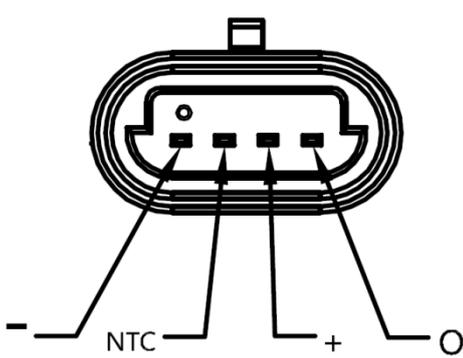


NAME	MS-E130 Electrical Specifications	NO	MS-1-4-195
-------------	--	-----------	-------------------

<p><u>Picture</u></p> 	<p><u>Plug</u></p> 
---	---

Drawing and Dimension

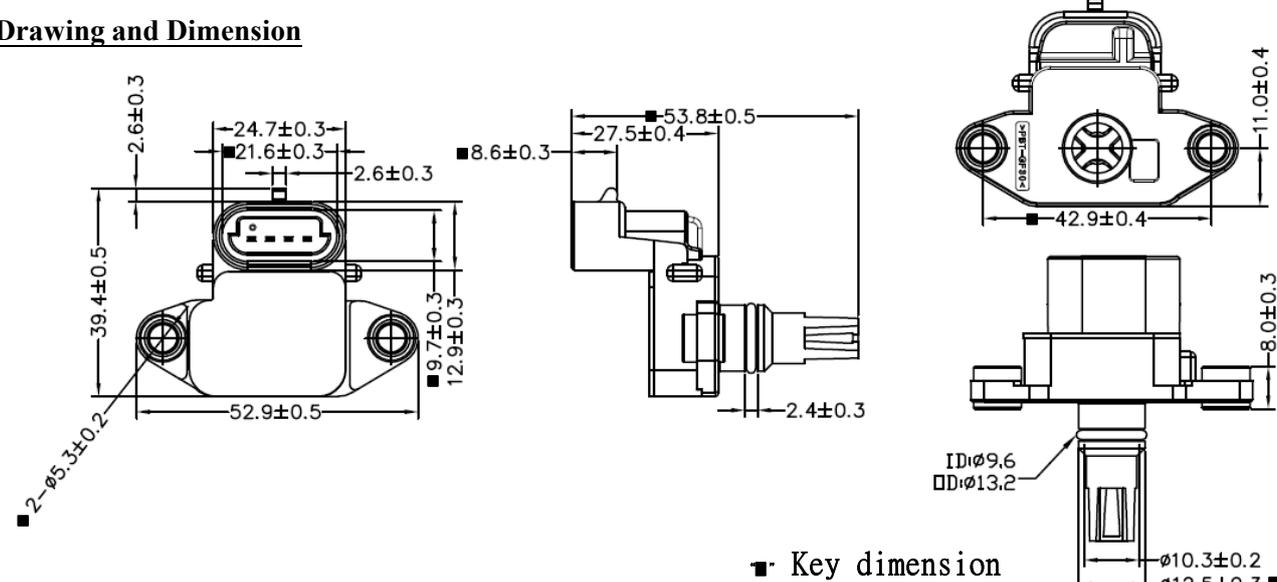

■ Key dimension

PARAMETERS AND CONDITIONS	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Storage Temperature Range	T _{ST}	-40		150	°C
Operating Temperature Range	T _{OP}	-40		125	°C
Pressure Range	Pr	13		108	KPa
Supply Voltage	V _{Sv}	4.8		5.2	V
Supply Current	I _{sc}		10		mA
Accuracy @ 25°C	%FS	-3		+3	%FS
The MAP voltage output at 25°C (@ Supply Voltage (Vs) =5.0Vdc, rated pressure = 101.3KPa)	V	4.25	4.55	4.85	V

2021.12.15		1	汪芳波	王亮	黄鹏	MOBILETRON
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	Dec.20.2021
						Release