
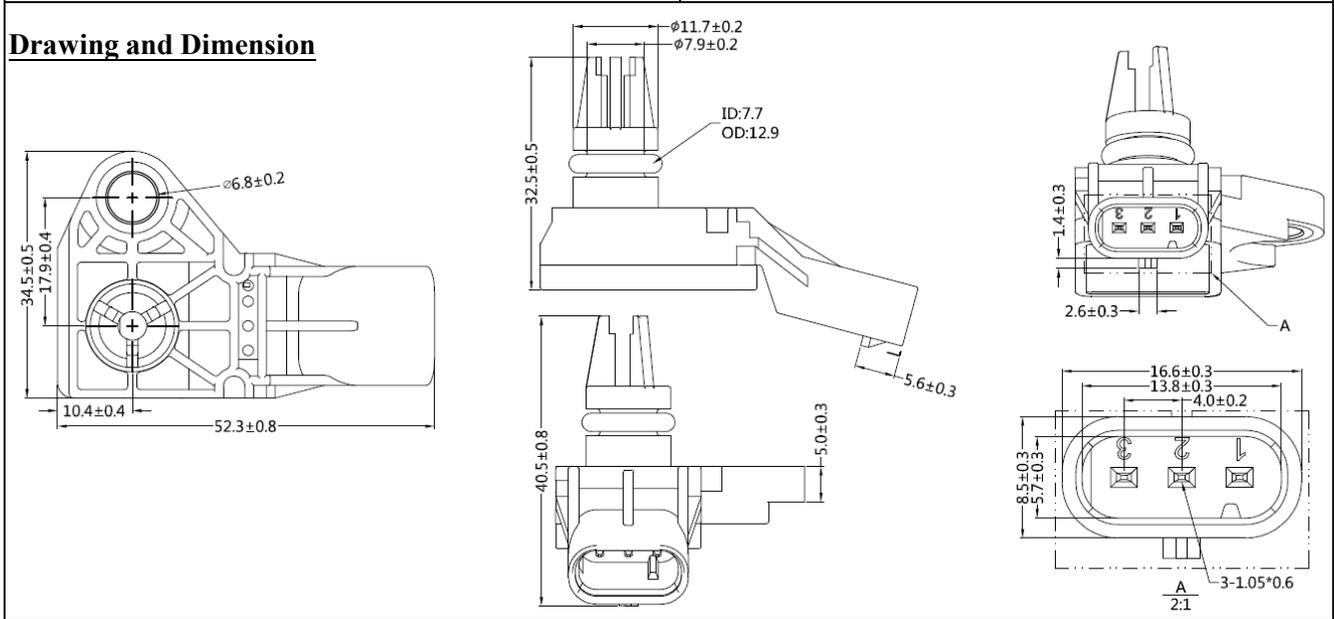


NAME	MS-E149 Electrical Specifications	NO	MS-1-4-220
-------------	--	-----------	-------------------

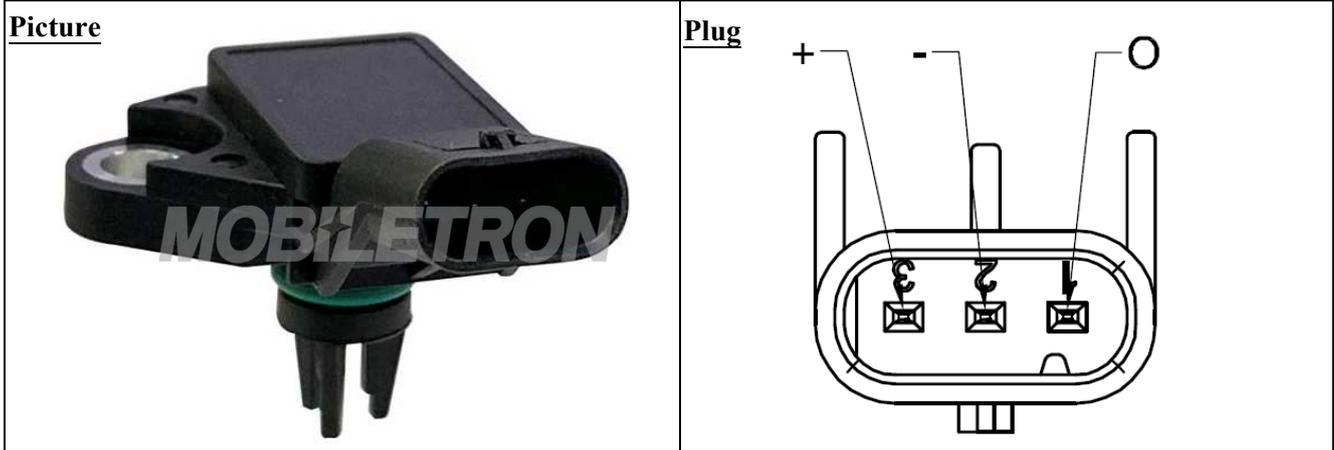

PARAMETERS AND CONDITIONS	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Storage Temperature Range	T _{ST}	-40		150	°C
Operating Temperature Range	T _{OP}	-40		125	°C
Pressure Range	P _r	3.3		215	KPa
Supply Voltage	V _{Sv}	4.8		5.2	V
Supply Current	I _{sc}		10		mA
Accuracy @ 25°C	%FS	-3		+3	%FS
The MAP frequency output at 25°C (@ Supply Voltage (Vs) =5.0Vdc, rated pressure = 101.3KPa)	f	1068	1368	1668	Hz

2022.01.13		1	王亮	汪芳波	黄鹏	MOBILETRON
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	Jan.18.2022
						Release