

**SEBANG**

SEBANG BATTERIES EUROPE GMBH

# TECHNICAL DATASHEET

Date

2019.05.31

Prepared by

Checked by

Approved by

Created:



2019.05.31

Type(GBC)


**DIN LB2**

**BAT062RKT**



Modified:

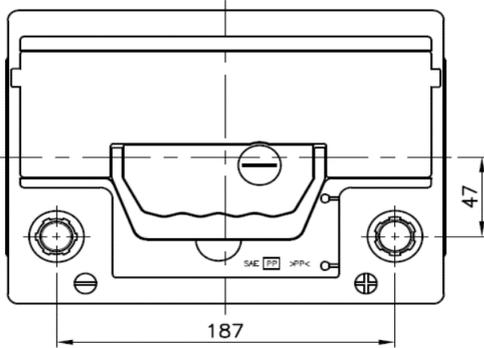

POSITIVE TERMINAL S=1:1  
SAE Standard



NEGATIVE TERMINAL S=1:1  
SAE Standard

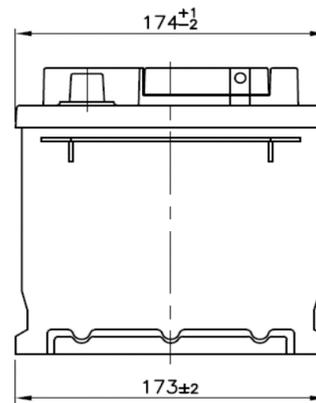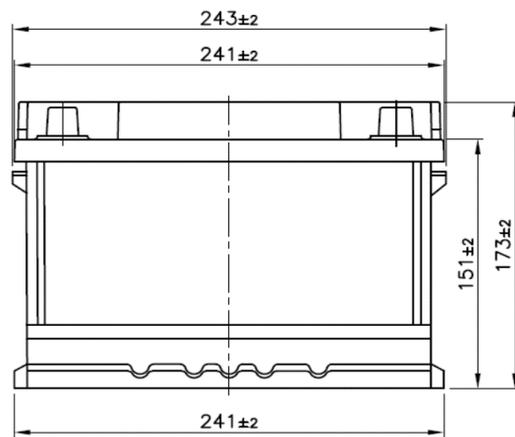

**PERFORMANCES**

**CONTAINER**

Voltage(V):	12	Nominal	Type:	LB2	Acc. To DIN
C20(Ah):	62		Hold Down:	Yes	with adaptor
RC(min):	100		H.D.Adapter:	No	
Cold Cranking Ampere(A):	540	EN	<b>COVER</b>		
Water Consumption(g/Ah):	Low(L)	0.9~1.0	Type:	Flat/Seald	-
Charge Acceptance(A):	6.5		Polarity:	(-,+)	Cell layout
Plates per Cell(pcs):	14		Terminal Adapter:	No	
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn		Magic Eye:	Yes	1 Ball
Neg./ Grid Alloy:	Exp. / Pb-Ca		Degassing system	Yes	Short side(CT)
Separator:	PE(Enveloped)		Flame Arrestor	Yes	2pcs
<b>WEIGHT &amp; DIMENSIONS (max.)</b>			Lateral Plug:	No	
Battery Weight(kg):	14.0	with acid			
Length(mm):	245				
Width(mm):	175		<b>PLUGS</b>		
Height(mm):	-		Type:	No	Vent Sealed
Total Height(mm) :	175		<b>Handle</b>		
			Type:	1x intergated	-
			<b>OTHERS</b>		
			Degassing Tube:	No	

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by GBC