

SEBANG

SEBANG BATTERIES EUROPE GMBH

TECHNICAL DATASHEET

Date

2019.05.31

Prepared by

Checked by

Approved by


Type(GBC)

DIN LB5**GR090EU**

Created:


2019.05.31

Modified:

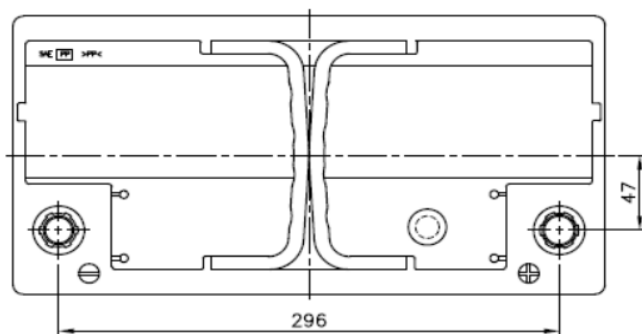



POSITIVE TERMINAL S=1:1

SAE Standard



NEGATIVE TERMINAL S=1:1

SAE Standard

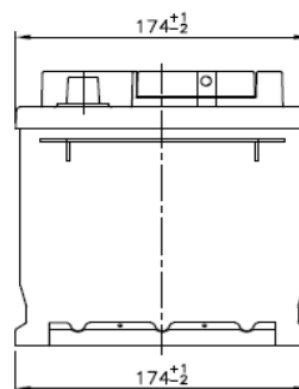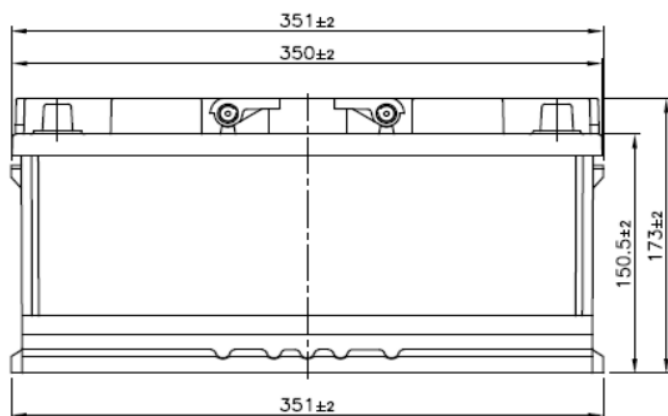**PERFORMANCES**

Voltage(V):	12	Nominal
C20(Ah):	90	
RC(min):	160	
Cold Cranking Ampere(A):	820	EN
Water Consumption(g/Ah):	Low(L)	0.9~1.0
Charge Acceptance(A):	9.5	
Plates per Cell(pcs):	21	
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn	
Neg./ Grid Alloy:	Exp. / Pb-Ca	
Separator:	PE(Enveloped)	

CONTAINER

Type:	LB5	Acc. To DIN
Hold Down:	Yes	with adaptor
H.D.Adapter:	No	

COVER

Type:	Flat/Seald	-
Polarity:	(-,+)	Cell layout
Terminal Adapter:	No	
Magic Eye:	Yes	1 Ball
Degassing system	Yes	Short side(CT)
Flame Arrestor	Yes	2pcs
Lateral Plug:	No	

WEIGHT & DIMENSIONS (max.)

Battery Weight(kg):	20.8	with acid
Length(mm):	354	
Width(mm):	175	
Height(mm):	-	
Total Height(mm) :	175	

PLUGS

Type:	No	Vent Sealed
-------	----	-------------

Handle

Type:	1x intergated	-
-------	---------------	---

OTHERS

Degassing Tube:	No	
-----------------	----	--

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by GBC