


Date	2019.01.14	
Prepared by	Checked by	Approved by

	<b>DIN B</b>	Created:	2019.01.14
Type(GBC)	<b>GB EFB 68032-29 (GR180EFBA)</b>	Modified:	

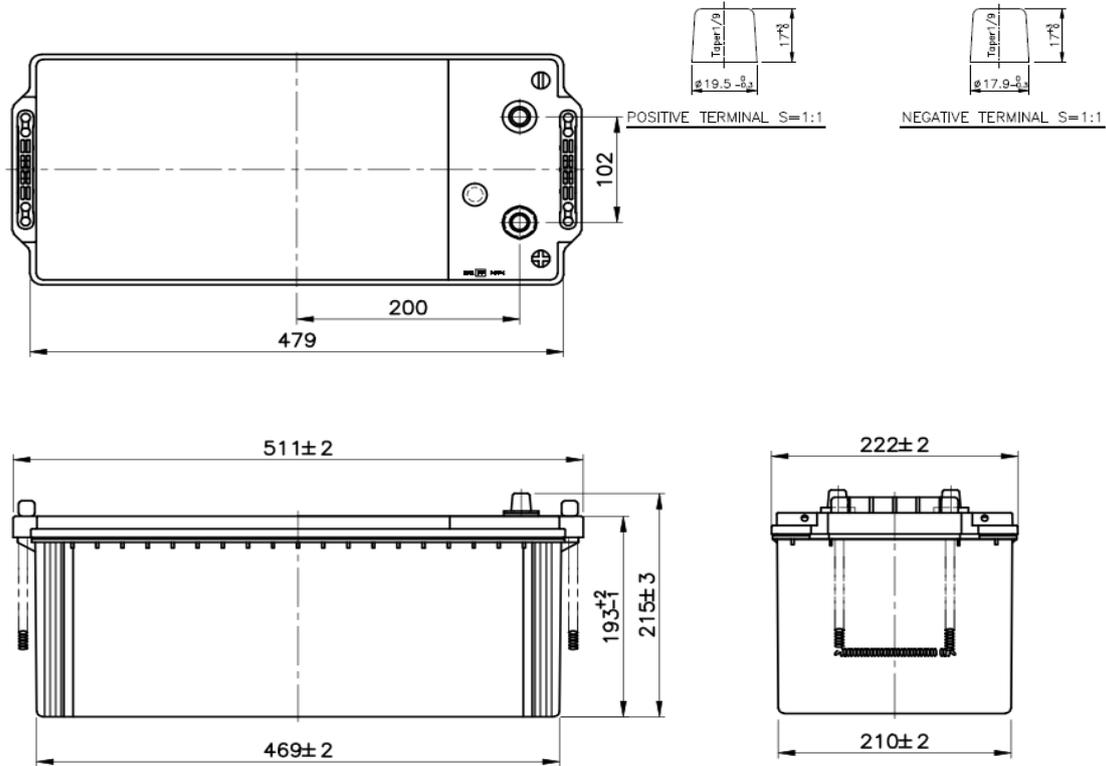

PERFORMANCES			CONTAINER		
Voltage(V):	12	Nominal	Type:	DIN B	EN50342-4
C20(Ah):	180		Hold Down:	No	
RC(min):	360		H.D.Adapter:	No	
Cold Cranking Ampere(A):	1200	EN	COVER		
Vibration:	V3	33Hz/6G/20h	Type:	Flat/Sealed	-
Endurance(DOD50%):	180	E3	Polarity:	(+,-)	Cell layout
Charge Acceptance(A):	18.0		Terminals:	Standard Large	
Water Consumption(g/Ah):	W3	4.0~5.0	Terminal Adapter:	No	
Plates per Cell(pcs):	29		Magic Eye:	Yes	1 Ball
Pos./ Grid Alloy:	Con-Punch / Pb-Ca-Sn		Degassing system	Long side	
Neg./ Grid Alloy:	Exp. / Pb-Ca		Flame Arrestor	Yes	2pcs(filter)
Separator:	PE(Enveloped)		Lateral Plug:	No	
WEIGHT & DIMENSIONS (max.)					
Battery Weight(kg):	46.5	with acid			
Length(mm):	513				
Width(mm):	224		PLUGS		
Height(mm):	195		Type:	No	Vent Sealed
Total Height(mm) :	218		HANDLES		
			Type:	Yes	2x Rope
			OTHERS		
			Degassing Tube:	No	

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by GBC