


Date	2019.01.14	
Prepared by	Checked by	Approved by

	<b>DIN A</b>	Created:	2019.01.14
Type(GBC)	<b>GR140SHD</b>	Modified:	

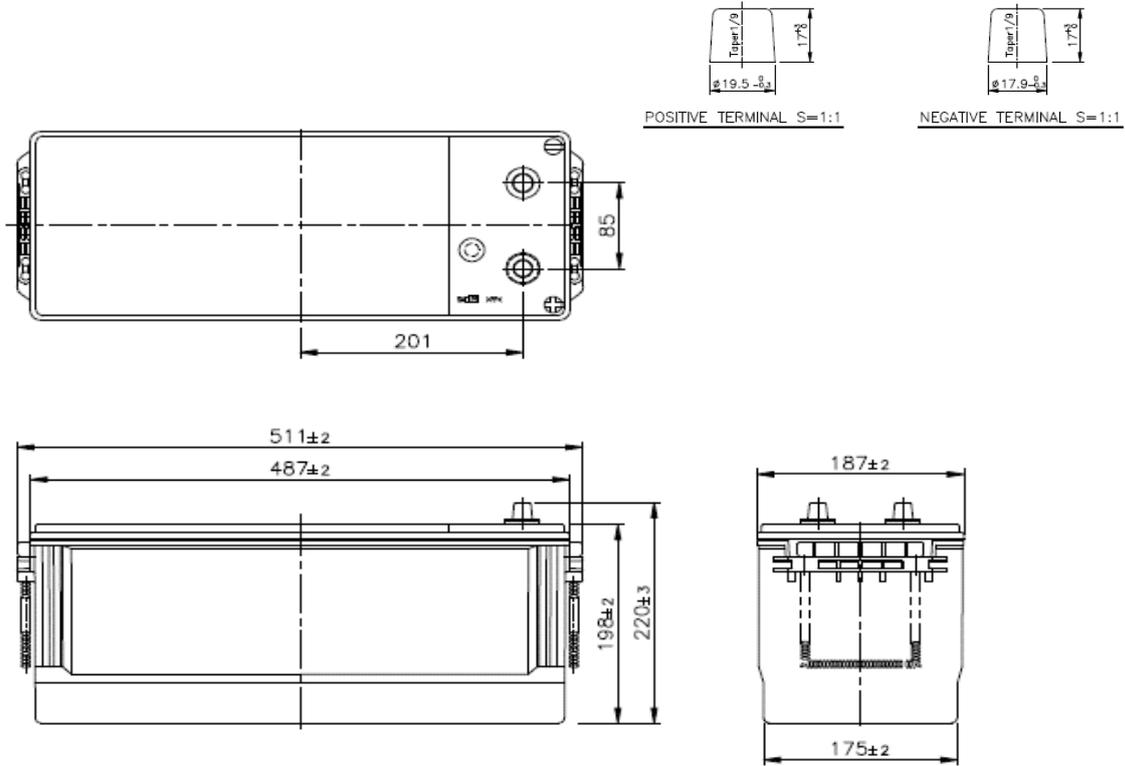

PERFORMANCES			CONTAINER		
Voltage(V):	12	Nominal	Type:	DIN A	EN50342-4
C20(Ah):	140		Hold Down:	No	
RC(min):	270		H.D.Adapter:	No	
Cold Cranking Ampere(A):	900	EN	<b>COVER</b>		
Vibration:	V3	33Hz/6G/20h	Type:	Flat/Sealed	-
Endurance(DOD50%):	180	E3	Polarity:	(+,-)	Cell layout
Charge Acceptance(A):	14.0		Terminals:	Standard Large	
Water Consumption(g/Ah):	W3	4.0~5.0	Terminal Adapter:	No	
Plates per Cell(pcs):	21		Magic Eye:	Yes	1 Ball
Pos./ Grid Alloy:	Con-Punch / Pb-Ca-Sn		Degassing system	Long side	
Neg./ Grid Alloy:	Exp. / Pb-Ca		Flame Arrestor	Yes	2pcs(filter)
Separator:	PE(Enveloped)		Lateral Plug:	No	
<b>WEIGHT &amp; DIMENSIONS (max.)</b>					
Battery Weight(kg):	37.0	with acid			
Length(mm):	513				
Width(mm):	189		<b>PLUGS</b>		
Height(mm):	200		Type:	No	Vent Sealed
Total Height(mm) :	223		<b>HANDLES</b>		
			Type:	Yes	2x Rope
			<b>OTHERS</b>		
			Degassing Tube:	No	

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by GBC