



# intAct Traktion-Power PzS

Closed lead-acid battery with armored plates | filled and charged | low maintenance

Art.No.

**06TP175**

|                     |                            |
|---------------------|----------------------------|
| Volt                | 6V                         |
| Capacity            | 185 AH (c5), 240 AH (c20)  |
| CCR -18°C (EN)      | -                          |
| Electrolyte         | diluted sulphuric acid     |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH)        | 262 x 181 x 281 mm         |
| Weight              | 29 kg                      |
| Pos. of Terminal    | 1                          |
| Terminal            | 1                          |
| Base plate          | -                          |



## Usage




## For the heaviest load


Since the active material here is "armored" in tubes, it can withstand the strongest cycles without loss of capacity. Ideal in multi-shift operation or for vehicles that need to be ready for use again after very short charging times. Our recommendation for heavy duty applications with 1,000 cycles.

- » **For heavy professional cyclic use:** 1,000 cycles according to IEC 254-1.
- » **More cycle resistant for the same battery size** compared to grid type plates.
- » **Armored plate technology:** Robust and technically mature for the heaviest loads.
- » **Particularly vibration-resistant in uneven outdoor use.** Tubes protect active material like an armor.
- » **Long service life.** Even in 2- to 3-shift operation. Durable, safe and reliable.


### Size



### Pos. of Terminal 1



### Terminal 1

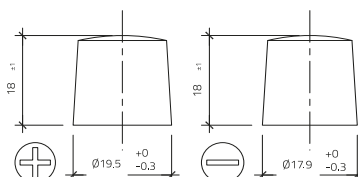

### Base plate -

As of 26.08.2024