



intAct Traktion-Power PzS

Closed lead-acid battery with armored plates | filled and charged | low maintenance

Art.No.

06TP190

| | |
|---------------------|---------------------------|
| Volt | 6V |
| Capacity | 190 AH (c5), 240 AH (c20) |
| CCR -18°C (EN) | - |
| Electrolyte | diluted sulphuric acid |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25°) |
| Size (LxWxH) | 262 x 181 x 281 mm |
| Weight | 29,1 kg |
| Pos. of Terminal | 1 |
| Terminal | 1 |
| Base plate | - |

Usage




For the heaviest load

Since the active material here is "armored" in tubes, it can withstand the strongest cycles without loss of capacity. Ideal in multi-shift operation or for vehicles that need to be ready for use again after very short charging times. Our recommendation for heavy duty applications with 1,000 cycles.


- » **For heavy professional cyclic use:** 1,000 cycles according to IEC 254-1.
- » **More cycle resistant for the same battery size** compared to grid type plates.
- » **Armored plate technology:** Robust and technically mature for the heaviest loads.
- » **Particularly vibration-resistant in uneven outdoor use.** Tubes protect active material like an armor.
- » **Long service life.** Even in 2- to 3-shift operation. Durable, safe and reliable.




Size



Pos. of Terminal 1



Terminal 1

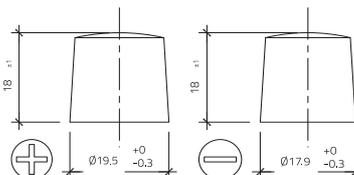

Base plate -

As of 26.08.2024