



# intAct Traktion-Power

Low-maintenance lead-acid battery with reinforced grid plates

Art.No.

**91801GUG**

|                     |                            |
|---------------------|----------------------------|
| Volt                | 6V                         |
| Capacity            | 180 AH (c5)                |
| CCR -18°C (EN)      | -                          |
| Electrolyte         | diluted sulphuric acid     |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH)        | 244 x 190 x 275 mm         |
| Weight              | 30 kg                      |
| Pos. of Terminal    | 1                          |
| Terminal            | 1                          |
| Base plate          | -                          |



## Usage




## Proven and cost-conscious


Due to their excellent high-current characteristics, they are particularly suitable for propelling golf carts, small leisure vehicles, wheelchairs, mobile lifting platforms, cleaning machines and forklifts. Our recommendation, for all who are looking for an inexpensive traction battery and are not afraid of maintenance.

- » **2 versions:** Wet charged (GUG) or dry-charged (TV).
- » **Light cyclic use:** 300 cycles according to IEC 254-1.
- » **Reinforced special-insulation grid plates** with high mass utilisation for maximum capacity reserves.
- » **6-volt and 12-volt versions.**
- » **Optional water filling system** can be attached to extend service intervals.
- » **Flooded lead-acid battery. Low maintenance.**


### Size



### Pos. of Terminal 1



### Terminal 1

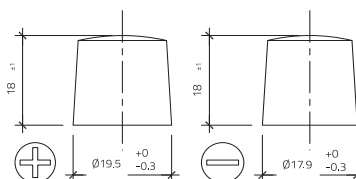

### Base plate -

As of 26.08.2024