



intAct Start-Stop-Power AGM

Sealed maintenance-free AGM battery | electrolyte absorbed in glass fibre mats | wet charged

Art.No.

AGM50SS

| | |
|---------------------|----------------------------|
| Volt | 12V |
| Capacity | 50 AH (c20) |
| CCR -18°C (EN) | 800 A (EN) |
| Electrolyte | diluted sulphuric acid |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH) | 260 x 173 x 206 mm |
| Weight | 17,5 kg |
| Pos. of Terminal | 1 |
| Terminal | 1 |
| Base plate | B07 |

Usage




Start. Stop. Keep charging.

Enables a high number of engine starts and supplies all consumers when the motor stops. Perfect for taxis, medium and high-end cars, SUVs and trucks with start-stop systems and micro-hybrids with brake energy recovery (recuperation). Our recommendation for start-stop vehicles with high energy demand and micro-hybrids with recuperation.


- » **Excellent starting characteristics** even at low charge level.
- » **Higher cycle stability and cold start performance** than a standard starter battery of same case size. Resulting in a **longer life expectancy**.
- » **Fantastic recharging behaviour** in the partial charge range.
- » **Also for vehicles with high energy requirements and/or a lot of additional equipment.**
- » **Double lid with safety valve (VRLA)**, gas recombination and backfire protection. Leak-proof.




Size




Pos. of Terminal 1



Terminal 1

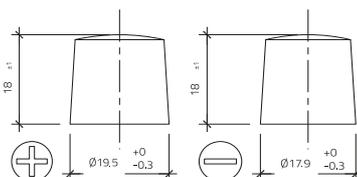

Base plate B07

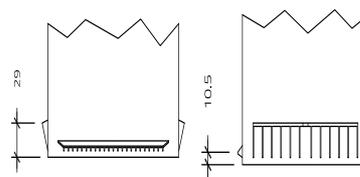

As of 26.08.2024