



intAct Marine-Power

Closed lead-acid battery with reinforced grid plates | low maintenance

Art.No.

MP100

| | |
|---------------------|---|
| Volt | 12V |
| Capacity | 80 AH (c5), 100 AH (c20), 110 AH (c100) |
| CCR -18°C (EN) | - |
| Electrolyte | diluted sulphuric acid |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH) | 353 x 175 x 190 mm |
| Weight | 22,5 kg |
| Pos. of Terminal | 0 |
| Terminal | 1 |
| Base plate | B13 |

Usage




Cost-conscious marine battery

Robust technology with good capacity absorption and high capacity reserves for small supply tasks as well as good high current characteristics in light cyclic use. Our recommendation for small dual-purpose applications on boats.


- » **Light cyclic use.** 300 cycles according to IEC 254-1.
- » **Reinforced grid plates** in special insulation with high mass utilization for maximum reserve capacity.
- » Robust, technically simple, mature technology for **applications with low, reliable power requirements.**
- » **Ideal for stand-by operation.**
- » **Excellent price/performance ratio.** Durable, safe and reliable.




Size




Pos. of Terminal 0



Terminal 1

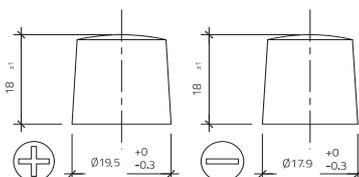

Base plate B13

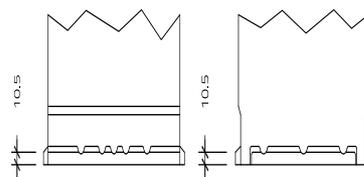

As of 26.08.2024