



intAct Premium-Power

Maintenance-free calcium battery (Ca/Ca) | wet charged

Art.No.

PP78MF

Volt	12V
Capacity	78 AH (c20)
CCR -18°C (EN)	760 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	278 x 175 x 190 mm
Weight	17,6 kg
Pos. of Terminal	0
Terminal	1
Base plate	B13



Usage




30% extra starting power


More suitable for highly equipped vehicles with many electrical consumers and in intensive city traffic. With minimal self-discharge, particularly safe and temperature resistant. Our recommendation for vehicles with a lot of equipment, especially if short distances are driven frequently.

- » **30% more cranking power** than standard starter battery with the same case size.
- » **Fast charging. Up to 1.5 times shorter charging time** due to faster current consumption than standard starter batteries of the same box size.
- » **Double lid for increased leakage protection and vapour condensation** (gaseous electrolyte condenses in the labyrinth lid and remains in the circuit).
- » 2 versions: For **passenger cars (also Asia models)** and for **trucks**.
- » **Premium-Power Truck vibration resistant V4** (HVR = High Vibration Resistance).


Size




Pos. of Terminal 0



Terminal 1

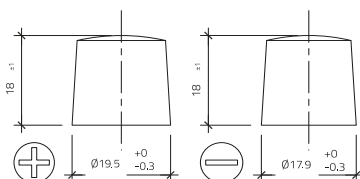

Base plate B13

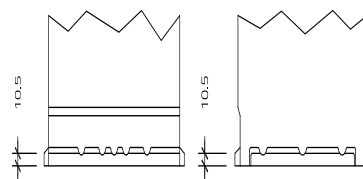

As of 26.08.2024