



intAct Solar-Power

Low-maintenance lead-acid battery with reinforced grid plates

Art.No.

SP110GUG

| | |
|---------------------|----------------------------|
| Volt | 12V |
| Capacity | 110 AH (c100) |
| CCR -18°C (EN) | - |
| Electrolyte | diluted sulphuric acid |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH) | 353 x 175 x 190 mm |
| Weight | 22,5 kg |
| Pos. of Terminal | 0 |
| Terminal | 1 |
| Base plate | B13 |

Usage




Proven and cost-conscious

Robust technology with good capacity absorption and high capacity reserves. Mainly used as power-supply in the hobby and leisure sector as well as for solar applications and small wind turbines. Our recommendation as intermediate storage for small solar applications.


- » **2 versions:** Wet charged (GUG) or dry-charged (TV).
- » **Light cyclical use.** 300 cycles according to IEC 254-1.
- » **Reinforced special-insulation grid plates** with high mass utilisation for maximum capacity reserves.
- » Robust, technically uncomplicated, mature technology for **applications with low, reliable power requirements.**
- » **Ideal for stand-by operation.**
- » **Excellent value for money.** Durable, safe and reliable.




Size




Pos. of Terminal 0



Terminal 1

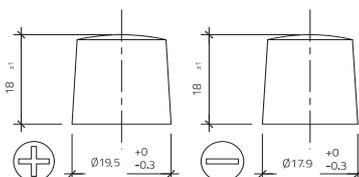

Base plate B13

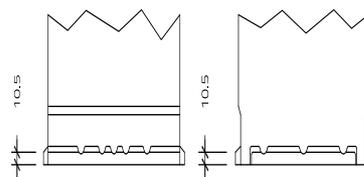

As of 26.08.2024