


NAME	CS-E382 Crankshaft Sensor	NO	CS-2-3-1021
-------------	----------------------------------	-----------	--------------------


Picture



Plug




Waveform



(Open Collector for 1KΩ)

Drawing and Dimension

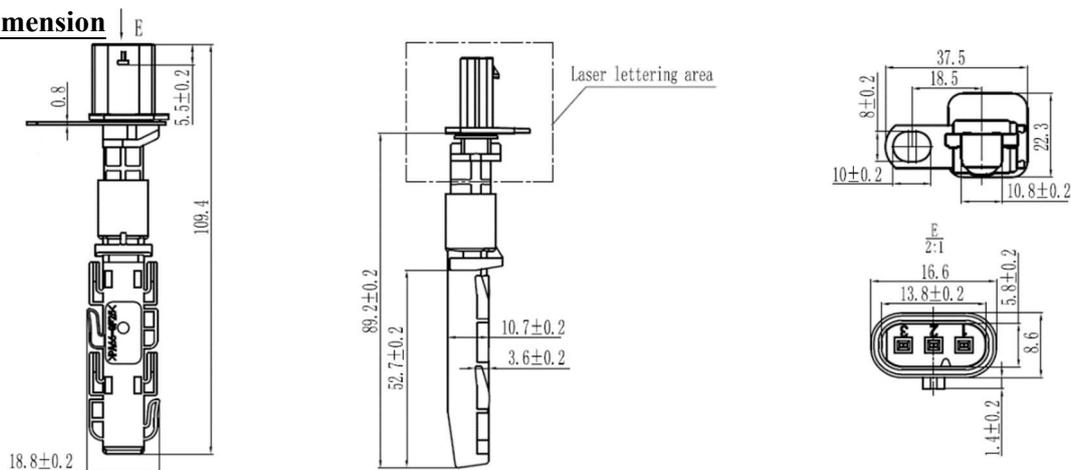

TYPE : Hall Magnetic

Parameter	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Resistance	R	N/A	N/A	N/A	ohm
Inductance@1KHz	L	N/A	N/A	N/A	mH
Working Voltage	V	5	12	18	V
Detecting range	Air Gap	0.5	1	1.5	mm
Magnetic field direction SFS=South facing sensor NFS=North facing sensor		N/A	N/A	N/A	
Duty ratio(t1/T)	Duty	90	96.8	99	%
Temperature	To	-40	25	125	°C
Reference Teeth		N/A	30-1	N/A	
Output Voltage Low (600RPM,12V,1mm)	V _{OL}	1	2	3	V
Output Voltage High (600RPM,12V,1mm)	V _{OH}	11	12	13	V

2021.11.25		1	王亮			MOBILETRON
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	Nov.30.2021
						Release