
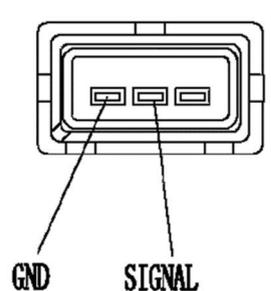
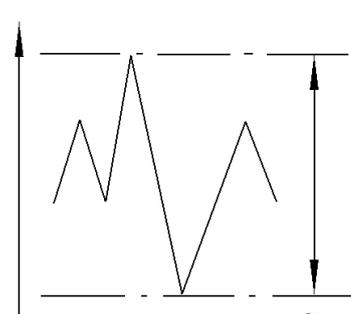


<b>NAME</b>	<b>CS-E385 Crankshaft Sensor</b>	<b>NO</b>	<b>CS-1-3-1028</b>
-------------	----------------------------------	-----------	--------------------

<b>Picture</b> 	<b>Plug</b> 	<b>Waveform</b> 
---	---	--

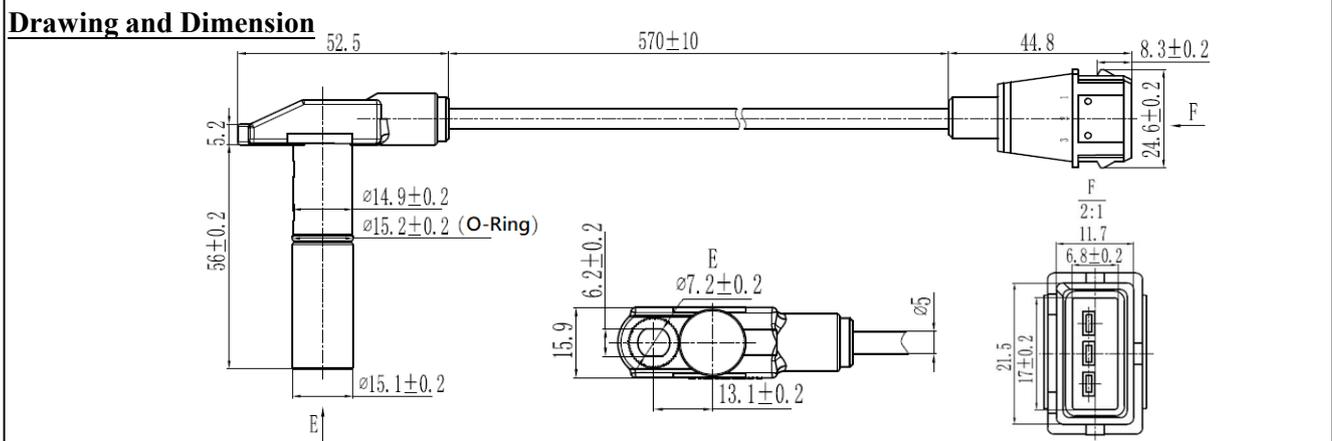

TYPE :  Hall  Magnetic

Parameter	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Resistance (25°C)	R	910	1056	1230	ohm
Inductance@1KHz	L	850	950	1150	mH
Working Voltage	V	N/A	N/A	N/A	V
Detecting range	Air Gap	N/A	1	N/A	mm
Magnetic field direction SFS=South facing sensor NFS=North facing sensor		N/A	NFS	N/A	
Duty ratio(t1/T)	Duty	N/A	N/A	N/A	%
Temperature	To	-40	25	125	°C
Reference Teeth		N/A	24-2	N/A	
Output Voltage (600RPM,1mm)	Vp-p	12.3	15.4	18.5	V

2022.03.21		1				<b>MOBILETRON</b>
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	<b>Mar.24.2022</b>
						<b>Release</b>