



intAct Start-Stop-Power EFB

Maintenance-free EFB (Enhanced Flooded Battery) | wet charged

Art.No.

EFB100SS

Volt	12V
Capacity	100 AH (c20)
CCR -18°C (EN)	900 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	353 x 175 x 190 mm
Weight	26 kg
Pos. of Terminal	0
Terminal	1
Base plate	B13

Usage




Start. Stop. Keep charging.

For small and medium-sized cars with start-stop systems and micro-hybrids with energy recovery. Enables an increased number of engine starts and supplies all consumers when the engine stops. Our recommendation if an EFB was installed in the start-stop system and you do not want to upgrade to AGM. Also as a starter battery for trucks with high power requirements.


- » **Excellent starting characteristics** even at low charge level.
- » **Higher cycle stability and cold start performance than standard starter battery** in same box size. Therefore longer life expectancy.
- » **Fantastic recharging behaviour** in the partial charge range.
- » **Maintenance-free battery** with lead-calcium-tin grids.
- » **Double lid with central degassing** and backfire protection. Leak-proof.




Size




Pos. of Terminal 0



Terminal 1

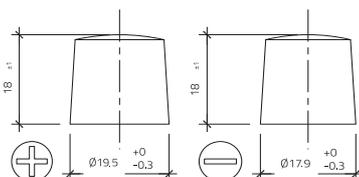

Base plate B13

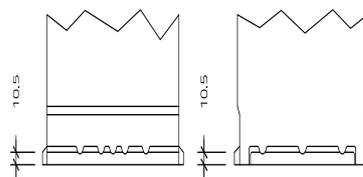

As of 26.08.2024