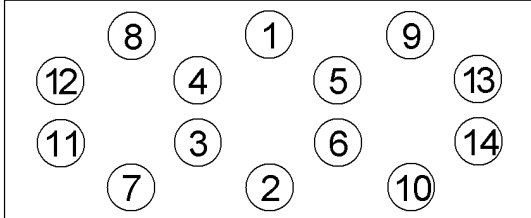


Anziehvorschrift für Zylinderkopf		452.420 passend für / suitable for adaptable à / adaptable a Jeep	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
Anziehen/ Tightening/ Serrage/ Apriete	* 22 lb-ft 45 lb-ft 45 lb-ft 1-10+12-14 / 110 lb-ft 11 / 100 lb-ft	* 30 Nm 60 Nm 60 Nm 1-10+12-14 / 150 Nm 11 / 135 Nm		
Zeichenerklärung / Explanations / Explication / Explicacion				
	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Jeep Cherokee 2001-1999 4.0L L6 242cid				
Jeep Grand Cherokee 2003-1999 4.0L L6 242cid				
Jeep TJ 2003-2000 4.0L L6 242cid				
Jeep Wrangler 2003-2000 4.0L L6 242cid				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*452.420*	