

## General informations

|                         |                            |
|-------------------------|----------------------------|
| Battery name            | C44B                       |
| Product Range           | Celeris - Standard Low DIN |
| European Type No. (ETN) | 544.065.040                |
| Polarity                | DX                         |
| Technology              | Flooded                    |
| Application             | SLI                        |
| Standard ref.           | EN 50342-1; EN 50342-2     |



Maintenance-free Ca/Ca technology high performance batteries, designed to offer good performance with excellent quality-price ratio.

## General characteristics

|                                   |     |
|-----------------------------------|-----|
| Voltage (V)                       | 12  |
| Capacity 20h (Ah)                 | 44  |
| Cold cranking Amps (CCA), EN (A)  | 400 |
| Energy at 20hrs rate and 25C (Wh) | 526 |
| Cranking Power 10" at -18°C (KW)  | 3,1 |

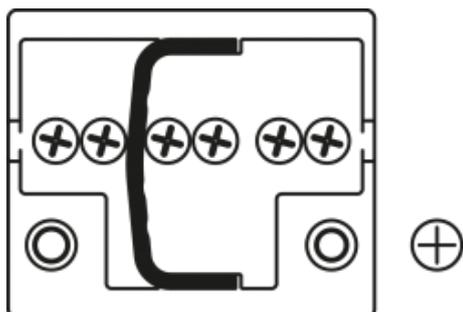
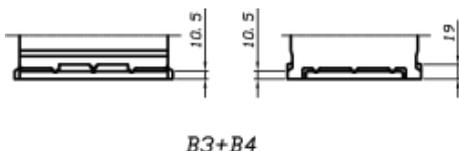
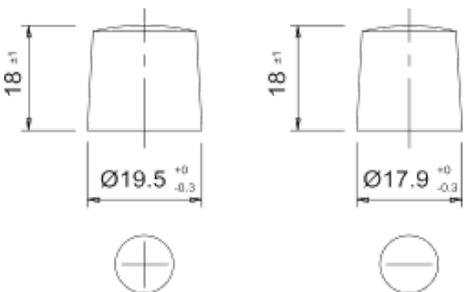
|                              |                 |
|------------------------------|-----------------|
| Dimensional group            | LBN1            |
| Sizes (LxWxH) (mm)           | 207 x 175 x 175 |
| Base Hold-Down               | B3(B4)          |
| Lay-out/Terminals            | 0 / 1           |
| Battery weight $\pm$ 5% (kg) | 10,3            |

## Box

|      |       |
|------|-------|
| Case | PP/PE |
| Lid  | PP/PE |
| Plug | PP/PE |

|        |       |
|--------|-------|
| Colour | Black |
| Colour | Black |
| Colour | Black |

## Drawings

| Lay-out  | Base hold down  | Terminals type  |
|--|---|---|
|  |  <p>B3+B4</p> |  <p>18<sup>+0.1</sup></p> <p>18<sup>+0.1</sup></p> <p>Ø19.5<sup>+0/-0.3</sup></p> <p>Ø17.9<sup>+0/-0.3</sup></p> |