

## General informations

|                         |                           |
|-------------------------|---------------------------|
| Battery name            | H74S                      |
| Product Range           | Hermeticum - Standard DIN |
| European Type No. (ETN) | S574.013.068              |
| Polarity                | SX                        |
| Technology              | Flooded                   |
| Application             | SLI                       |
| Standard ref.           | EN 50342-1; EN 50342-2    |



"Sealed" battery with double lid and labyrinth thermo welded to the upper lid. The double lid includes flame arrestor device.

## General characteristics

|                                   |     |
|-----------------------------------|-----|
| Voltage (V)                       | 12  |
| Capacity 20h (Ah)                 | 74  |
| Cold cranking Amps (CCA), EN (A)  | 680 |
| Energy at 20hrs rate and 25C (Wh) | 884 |
| Cranking Power 10" at -18°C (KW)  | 5,3 |

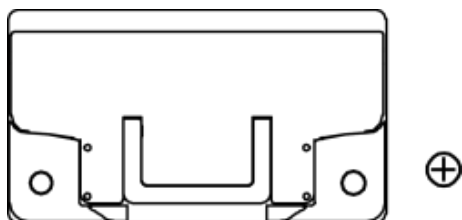

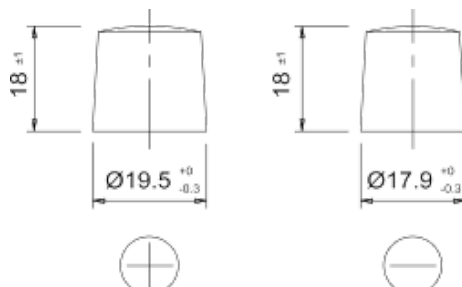
|                               |                 |
|-------------------------------|-----------------|
| Dimensional group             | LN3             |
| Sizes (LxWxH) (mm)            | 275 x 175 x 190 |
| Base Hold-Down                | B3(f)           |
| Lay-out/Terminals             | 1 / 1           |
| Battery weight $\pm 5\%$ (kg) | 16,6            |

## Box

|      |       |
|------|-------|
| Case | PP/PE |
| Lid  | PP/PE |
| Plug | PP/PE |

|        |       |
|--------|-------|
| Colour | Black |
| Colour | Black |
| Colour | Black |

## Drawings

| Lay-out                                                                            | Base hold down                                                                             | Terminals type                                                                        |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | <br>B3 |  |