



intAct Start-Stop-Power EFB

Maintenance-free EFB (Enhanced Flooded Battery) | wet charged

Art.No.

EFB68SS-0-ASIA

| | |
|---------------------|----------------------------|
| Volt | 12V |
| Capacity | 68 AH (c20) |
| CCR -18°C (EN) | 730 A (EN) |
| Electrolyte | diluted sulphuric acid |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH) | 270 x 173 x 222 mm |
| Weight | 19,5 kg |
| Pos. of Terminal | 0 |
| Terminal | 1 |
| Base plate | B01 |

Usage




Start. Stop. Keep charging.

For small and medium-sized cars with start-stop systems and micro-hybrids with energy recovery. Enables an increased number of engine starts and supplies all consumers when the engine stops. Our recommendation if an EFB was installed in the start-stop system and you do not want to upgrade to AGM. Also as a starter battery for trucks with high power requirements.


- » **Excellent starting characteristics** even at low charge level.
- » **Higher cycle stability and cold start performance than standard starter battery** in same box size. Therefore longer life expectancy.
- » **Fantastic recharging behaviour** in the partial charge range.
- » **Maintenance-free battery** with lead-calcium-tin grids.
- » **Double lid with central degassing** and backfire protection. Leak-proof.




Size




Pos. of Terminal 0



Terminal 1

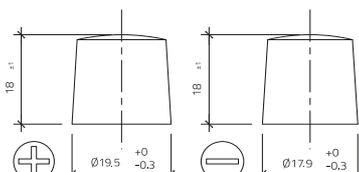

Base plate B01

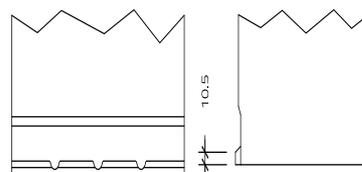

As of 26.08.2024